

TIMEto BUILD

Tiny Palace

2022



Small
large in
living areas
comfort







BAMWOO

Tiny Palace

Welcome to a small, unique and comfortable world. If you are tired of the chaos of the city, thinking of being alone and wanting privileges in living quarters, we invite you to the Bamoo Small Palace.

Why should you prefer Bamoo Small Palace?

Let's find the answer to this together. It offers an experience complementing with its unique design and unique architecture where you open your window to infinity with small wooden structures beautiful in nature. The small mansion area ranges from 10 to 30 square meters and is a lifestyle. Nowadays, people prefer to spend a holiday in the small mansion, because it is safe and environmentally friendly.

Small mansion provides the advantage of maximum space in minimum space. It helps you save space through the living area, bedroom, kitchen and bathroom, and also allows you to live your dreams.



”

Why should we prefer *Bamwoo Tiny Palace*?

Bamwoo Tiny Palace offers great comforts in small living spaces. It also promises a sheltered, comfortable and innovative experience.

Bamwoo Tiny Palace models have the comfort and aesthetics that you can happily experience in any season. In addition, Bamwoo Tiny Palace brings you the concept of your dreams and presents the new life model, which has become a trend all over the world, to you in the highest quality and professional.





CREATIVE LIGHTING

3D DESIGN





1. Tiny Palace can be moved to any location

The Bamwoo Tiny Palace is a portable system and can be towed with any car and transported to any location. You can easily place it in any position you want. It can be easily preferred for users who want to experience the comfort of a luxury hotel in a minimal area. In this way, it provides a unique experience to its users.

ORIGINAL DESIGN



2. Technical specifications of Tiny Palace

The Tiny Palace provides a minimal philosophy of life with its size. It provides its users with a comfortable and luxurious life. Mini Palaces have living areas such as kitchen, bathroom, living room and bedroom.

Hall: 8m²

Kitchen: 5.45m²

Bathroom: 4m²

Bedroom: 5m²





ORIGINAL DESIGN



3D DESIGN



ORIGINAL DESIGN



3. Options



AUTOMATIC DOOR SYSTEMS



AUTOMATIC AWNING



PATIO



SMART CURTAIN ROD



JACUZZI



GAME CONSOLE



SMART HOUSE SYSTEM



WASHING MACHINE-DISHWASHER



COFFEE MACHINE-MICROWAVE



TOSHIBA HAORI AIR CONDITIONING



E&P HYDRAULIC STABILIZATION LEGS
AUTOMATIC CARAVAN SELF LEVELLING SYSTEM



SATELLITE SYSTEMS

What is Package Water Treatment System?

Package Water Treatment System: Separates and filters water from harmful particles with a special system. In this way, water, which is very important for living life, is made ready for use and, can also be used as drinking water.



WASTEWATER TANK



CLEAN WATER TANK




UNDERFLOOR HEATING SYSTEM



CAMERA SYSTEM

4. Installation Information on model



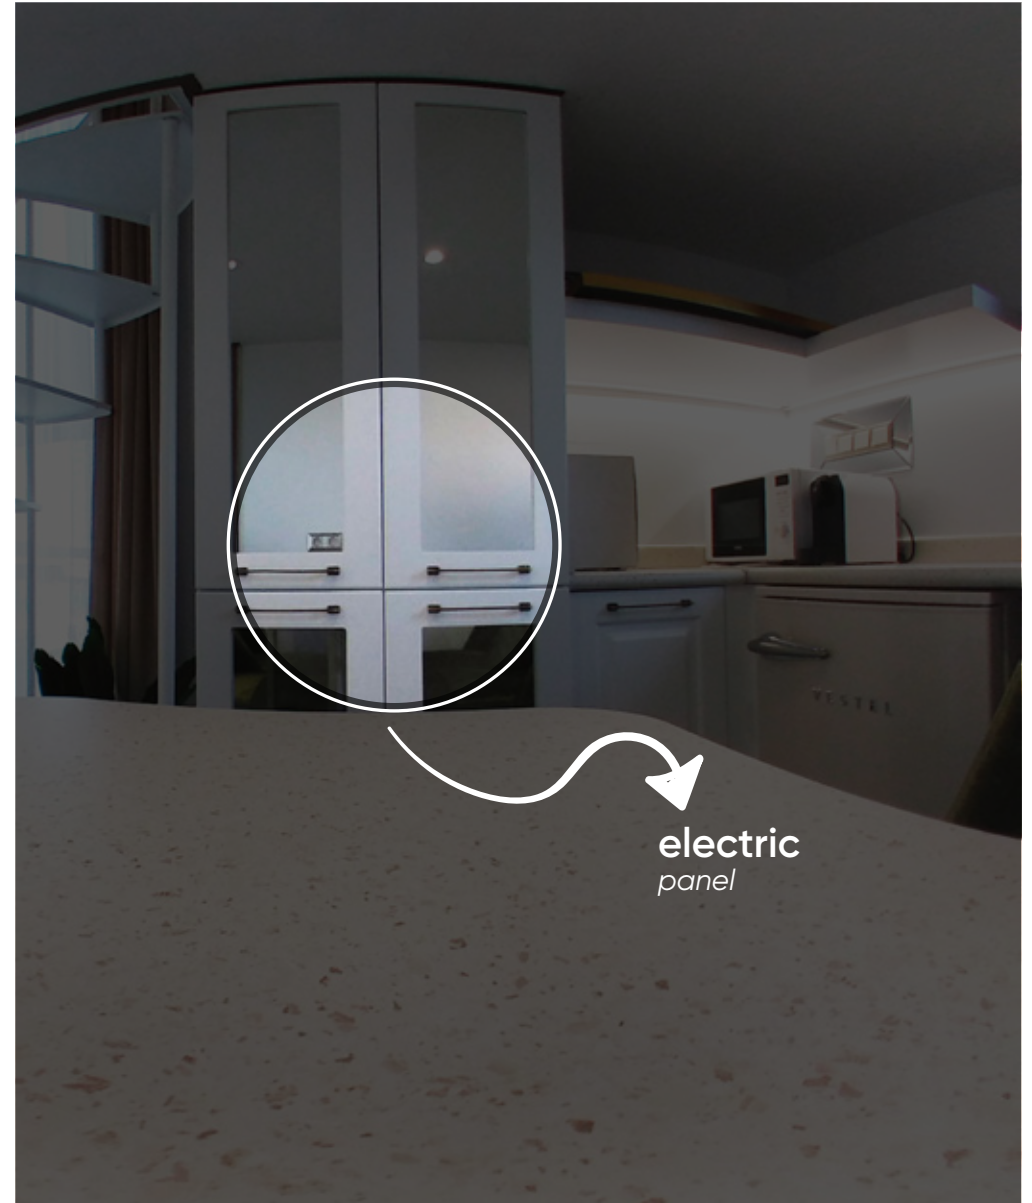

TOSHIBA

OWNER'S MANUAL



3 AIR FLOW DIRECTION

1	Press FIX : Move the louver in the desired vertical direction.	
2	Press DIR : Move the louver in the desired horizontal direction.	
3	SWING operation can be selected from MENU button MENU	<ul style="list-style-type: none"> Vertical (Up-Down) swing Horizontal (Left-Right) swing Vertical and Horizontal swing HADA Care flow H.D.A

Note:

- Do not move the louver manually by hands or others.
- The louver may automation positioning by some operation mode.

1 INDOOR UNIT DISPLAY

- | | | |
|---|---|------------------------|
| ② | ① | ① ECO (White) |
| ③ | ④ | ② Wi-Fi access (White) |
| ⑤ | ⑤ | ③ PURE (White) |
| | ⑥ | ④ Timer (White) |
| | ⑦ | ⑤ Operation Mode |
| | | - Cool (Blue) |
| | | - Heat (Orange) |

- Display brightness can be adjusted, follow procedure on ⑩.

2 PREPARATION BEFORE USE

Preparing Filters

- Open the air inlet grille and remove the air filters.
- Attach the filters. (see detail in the Installation Manual).

Loading Batteries (when use wireless operation.)

- Remove the slide cover.
- Insert 2 new batteries (AAA type) following the (+) and (-) positions.

Remote Control Reset


- Remove the batteries.
- Press **RESET**.
- Insert the batteries.



4 REMOTE CONTROL

- Infrared signal emitter
- Start/Stop button
- Mode select button
- Temperature button
- Fan speed button
- Menu select button
- Set louver Up-Down button
- Set louver Left-Right button
- Check button*

*Check button under battery cover

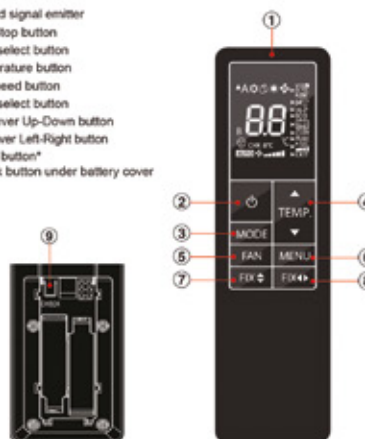

5 COOLING / FAN ONLY / OPERATION

- Press **MODE** : Select Cool or Fan only .
- Press **TEMP** : Set the desired temperature. Min. 17°C, Max. 30°C.
Fan Only: No temperature indication
- Press **FAN** : Select AUTO, LOW, LOW+, MED, MED+, HIGH or Quiet .

6 AUTOMATIC OPERATION

To automatically select cooling, heating, or fan only operation

- Press **MODE** : Select Auto A.
- Press **TEMP** : Set the desired temperature. Min. 17°C, Max. 30°C.
- Press **FAN** : Select AUTO, LOW, LOW+, MED, MED+, HIGH or Quiet .

7 HEATING and 8°C OPERATION

- Press **MODE** : Select Heat .
 - Press **TEMP** : Set the desired temperature. Min. 5°C, Max. 30°C.
* Temperature range 5-16°C is Heat mode with 8°C operation with less of energy usage
 - Press **FAN** : Select AUTO, LOW, LOW+, MED, MED+, HIGH or Quiet .
- Note: During 8°C mode active (temperature range 5-16°C), some operation such as QUIET, HI-POWER, TIMER OFF cannot use.

8 DRY OPERATION

For dehumidification, a moderate cooling performance is controlled automatically.

- Press **MODE** : Select Dry .
 - Press **TEMP** : Set the desired temperature. Min. 17°C, Max. 30°C.
- Note: DRY mode fan speed is set to Auto only.

9 MENU SETUP

For select more setting of Air conditioner such as Louver select **MENU**, Hi Power, OFF Timer and other use MENU button



9.1 LOUVER SWING and HADA CARE FLOW OPERATION

Comfortable air flow can select from feature.

Louver swing operation:

- To distribute air flow in both vertical and horizontal by swing the louver automatically.

HADA care flow operation:

- Air flow upward to the ceiling, provide indirect air flow to body and homogenize room temperature.

Note:

- During HADA CARE FLOW mode, FIX button cannot active.

Louver Swing and HADA Care Flow Operation Setting

- Press MENU button for enter menu selection




During triangle mark blink can select menu by press TEMP. button.



- Enter Louver set by press MENU button again. triangle mark will stop blink and setting feature will be blink instead.



- Select Louver swing or HADA CARE FLOW by press TEMP. button.



H.D.A

- Confirm selected feature by press MENU button again.



When feature had selected will return to menu selection display triangle mark will blink

- Leave from menu setting display by select exit and press menu button



Leave from menu setting to normal display (no triangle and feature blink).

AUTOMATIC DOOR

OWNER'S MANUEL



6.3.1 OFF Mode

Key off position.
The door does not work.
If there is no one in the entrance area, the door closes and remains closed.
If there is an electric lock, it is locked.



6.3.2 EXIT Mode

Entry is possible only from the inside out. External Radar Is Disabled.
In the key exit position.
With this function you can limit the input.
People can come out, but they can't go in.



6.3.3 Automatic Mode

The passage of people is possible from inside and outside.
All radars and activators are activated.
When the key is in its automatic position,
the door opens and closes if no one is there.




6.3.4 Open Mode

The door stays open.
The key is in the open position.
With this function, the door opens to the end of the opening distance and
remains open in this position.

9. DPS Digital Program Switch

9.1 Genel



General DPS display

Buttons

9.2 Initiation of DPS and Provision of Energy

DPS Display	Function	Description
IN	Start	Stays on for 15 seconds when powered up
CE	Communication Error	DPS cannot log in to the controller

9.3 Usage

Activating DPS

	Action	Defining
	3 seconds press up back	Screen lights up dps ready

User Actions

	Action	Defining
	Choose with UP or DOWN Press ENTER Cancel with BACK	Change from symbol flash mode to permanent display with Enter
	Choose with UP or DOWN Press ENTER Cancel with BACK	Change from symbol flash mode to permanent display with Enter

9.4 DPS Dijital Program Şalteri

DPS Display	Function	Description	DPS Display Submenu	Description
	OFF			
	EXIT			
	AUTO			
	ON			
	WINTER MODE	Reduced opening distance		"00" Without winter function
		(Default:00)		"01" With Winter Function
	Opening speed	"00" to "99" Percent 100% -> 0.9 m/s		
	Open hold time	"00" to "99" Percent		
	Closing speed	"00" to "99" Percent 100% -> 0.7 m/s		



Address: GUnit No.: Office G31 Regus, Doha The Pearl Building 84, Street 224, Area 66 Piazza Level,
QQ05A, Qanat Quartier The Pearl, PO Box 301588, Doha, Qatar

E-Mail: info@qatartimetobuild.com

Web: www.qatartimetobuild.com



timetobuild1



timetobuild1



timetobuild



timetobuild